

GLARE SHIELD

INSTALLATION INSTRUCTIONS

ENERGYLITE



IMPORTANT: Read ALL instructions before starting installations.

CAUTION: To reduce risk of shock, **TURN OFF ELECTRICAL SUPPLY** before installing/servicing fixtures.

INSTALLATION INSTRUCTIONS

- Determine desired orientation of the glare shield with respect to the fixture, see below illustrations.
- Remove set screws around perimeter of optic frame with the 5/64 allen wrench (provided). Only remove the ones that are required for the specific orientation.
- Place glare shield onto mounting surface of fixture and fasten with the provided hex flange screws (torque to 18 in-lbs).


NOTE: Glare shields are not intended to be used with trespass shield accessories.

REQUIRED TOOLS

STRAIGHT
SCREWDRIVER



5/64 ALLEN
WRENCH (provided)

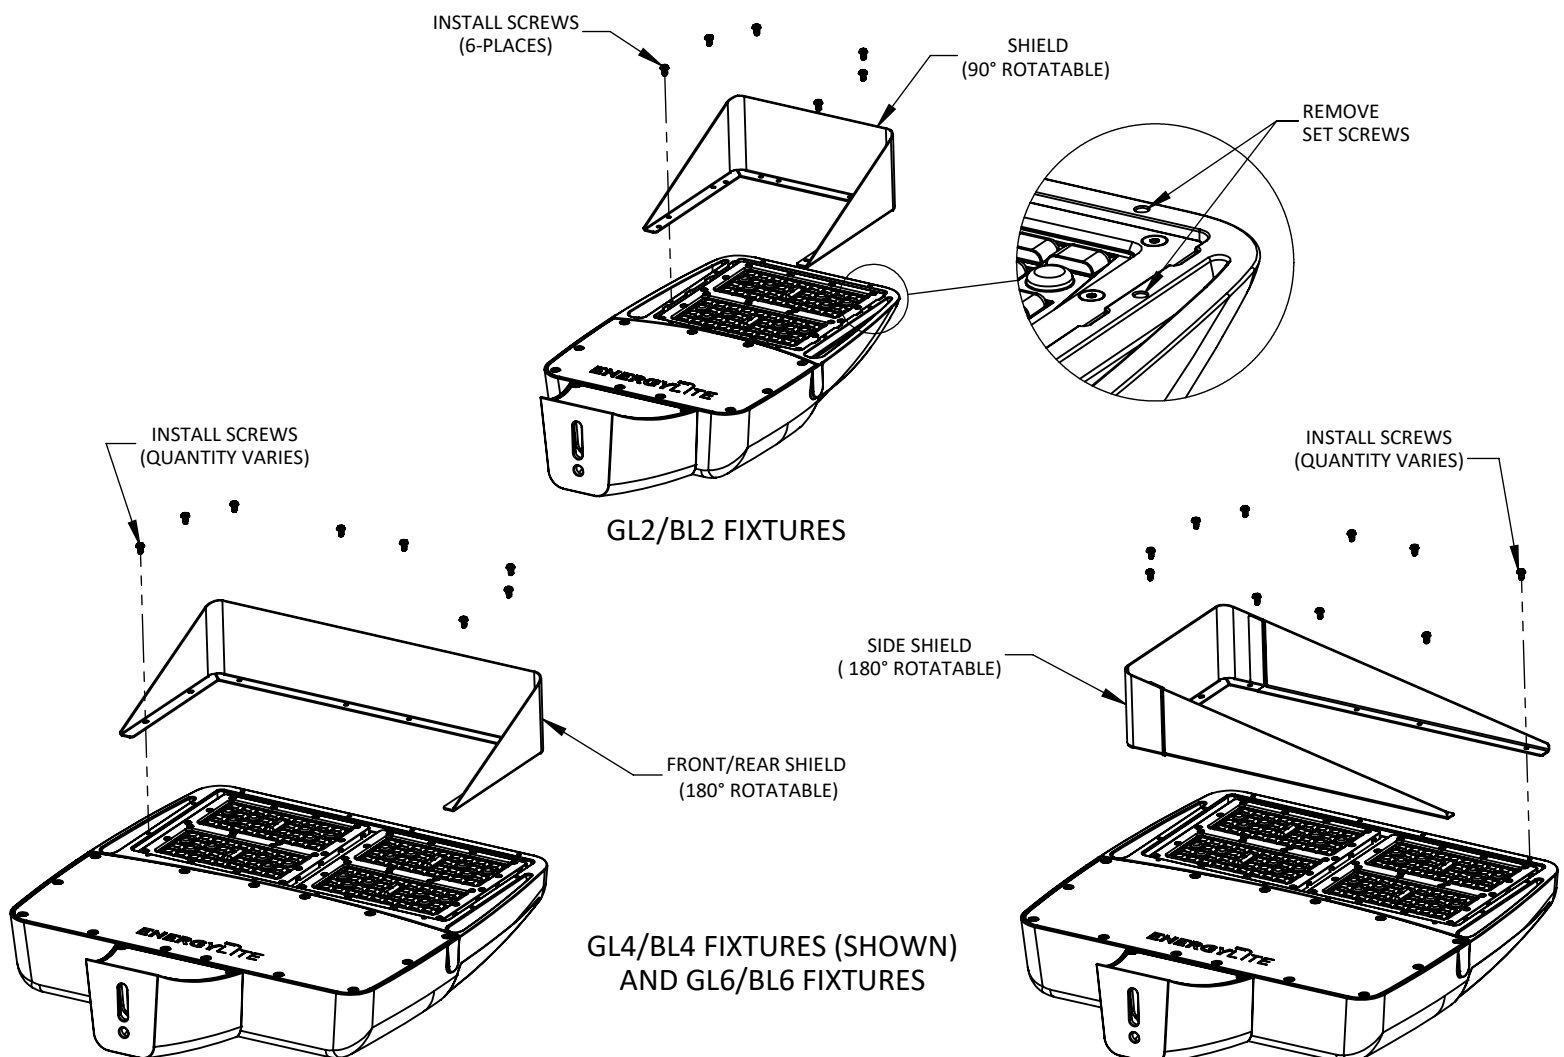

5017-000004, rev B.