

ZT3

ZHAGA BOOK 18

IR + AMBIENT LIGHT CONTROL

ENERGYLITE



PROJECT

TYPE

SPECIFICATION

Designed to replace traditional photocells mounted on top of the luminaire with a more discrete sensor below.

- For use in the following EnergyLite product families:
 - HawkLite
 - BroadLite
 - GridLite
 - SecureLite
- Proprietary Ambient Light Sensor for use with 0-10V drivers (0.5V dim-to-off)
- Dual daylight sensors to allow for distinguishing between sunlight and LED output to prevent false positives
- Mounted to isolated output of driver so no risk of surge damage from extreme events
- Lifetime > 100,000 cycles
- IP65 polycarbonate housing with UV protection
- IK09 impact resistance
- RoHS compliant
- Power Consumption: <0.25W
- Operational Range: -20°C to 70°C
- Turn On: 5 fc @ 10s
- Turn Off: 9 fc @ 30s
- Fail-On standard

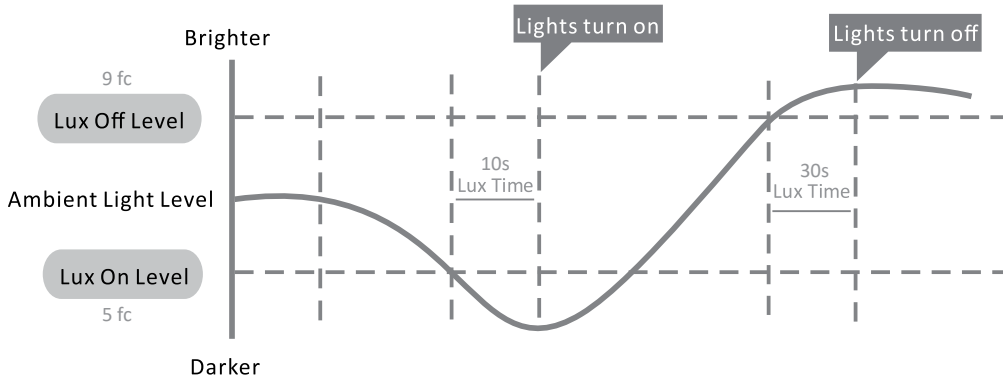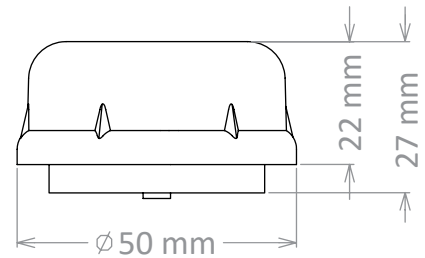

ZT3


ZHAGA BOOK 18 | OCCUPANCY
+ IR + AMBIENT LIGHT CONTROL

PROJECT _____

TYPE _____

SPECIFICATION _____

IR REMOTE SETTINGS

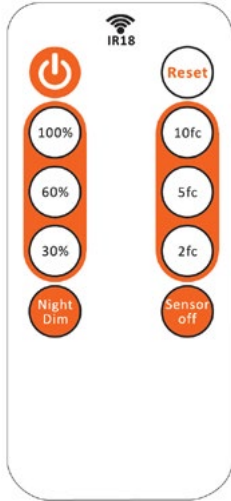

- Light indicator flickers 3 times when sensor successfully receives signal from remote
- Permanent ON/OFF function: default OFF will be recalled in case of power failure
- Reset function: Resets to factory settings - 5 fc @ 100% power
- Max light output selection: 100%, 60%, 30% options; recalled in case of power failure
- Preset daylight sensor threshold: 10 fc, 5 fc, 2 fc options; recalled in case of power failure
- Night Dim function: starts at 100% output for 4 hours then reduces to 60% output for the remainder of the night
- Sensor off: fixture remains permanent on; recalled in case of power failure